


QUADRO® Druckspannfutter

QUADRO® Dead Length Collet Chucks

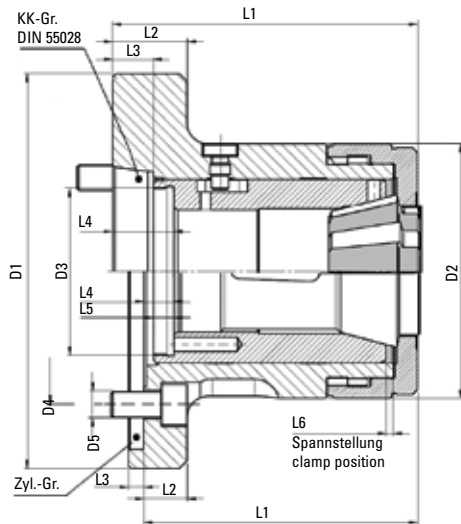

QUADRO® Druckspannfutter

QUADRO® Dead Length Collet Chuck


Typ type	Art. Nr. item no.	Größe size	KK-Gr. Zyl.-Gr.	Rubber- Flex® Nr./no.	Spannzange collet Nr./no.	D1 [mm]	D2 [mm]	D3 [mm]	D4 [mm]	D5 [mm]	L1 [mm]	L2 [mm]	L3 [mm]	L4 [mm]	L5 [mm]	L6 [mm]	Drehzahl* rpm* max. [min ⁻¹]
KSFB 26/4	036.000.2.157	26	A2-4	RFC 20	161 E	112	85	M50 x 1,5	82,6	3 x M10	103,4	30	13	22	8	2	6000
KSFB 26/100	036.000.2.171	26	Z100	RFC 20	161 E	112	85	M50 x 1,5	82,6	3 x M10	97,5	24	6	16	8	2	6000
KSFB 30/4	036.000.2.159	30	A2-4	RFC 24	163 E	112	85	M50 x 1,5	82,6	3 x M10	103,4	30	13	22	8	2	6000
KSFB 30/100	036.000.2.173	30	Z100	RFC 24	163 E	112	85	M50 x 1,5	82,6	3 x M10	97,5	24	6	16	8	2	6000
KSFB 40/5	036.000.2.161	40	A2-5	RFC 36	173 E	135	100	M66 x 1,5	104,8	4 x M10	123,5	27	16	28	8	2,5	6000
KSFB 40/6	036.000.2.163	40	A2-6	RFC 36	173 E	170	100	M66 x 1,5	133,4	4 x M12	123,5	34,4	17,5	28	8	2,5	6000
KSFB 40/88	036.000.2.185	40	Z88	RFC 36	173 E	132	100	M66 x 1,5	115	6 x M8	113,4	17	4	14	8	2,5	6000
KSFB 40/140	036.000.2.175	40	Z140	RFC 36	173 E	155	100	M66 x 1,5	104,8	3 x M10	107,5	17	6	12	8	2,5	6000
KSFB 60/6	036.000.2.165	60	A2-6	RFC 52	185 E	170	130	M90 x 1,5	133,4	4 x M12	145	27	17,5	30,5	8	2,5	5000
KSFB 60/8	036.000.2.167	60	A2-8	RFC 52	185 E	220	130	M90 x 1,5	171,4	4 x M16	145,9	37,5	20	31,5	8	2,5	5000
KSFB 60/115	036.000.2.186	60	Z115	RFC 52	185 E	154	130	M90 x 1,5	136	8 x M8	127,5	11	4	13	8	2,5	5000
KSFB 60/170	036.000.2.177	60	Z170	RFC 52	185 E	185	130	M90 x 1,5	133,4	6 x M12	133	24	6	18,5	8	2,5	5000
KSFB 60/220	036.000.2.179	60	Z220	RFC 52	185 E	235	130	M90 x 1,5	171,4	6 x M16	135	26	6	20,5	8	2,5	5000
KSFB 80/8	036.000.2.169	80	A2-8	-	193 E	220	156	M114 x 2	171,4	6 x M16	176,4	35	19	41	11	6,5	4000

* ungewuchtet
Camlock und weitere Futtertypen auf Anfrage.

* unbalanced
Camlock and other types on request.

Es können Rubber-Flex® RFC oder Druckspannzangen nach DIN 6343 eingebaut werden.

As Standard we use Rubber-Flex® RFC or dead length collets according to DIN 6343



S. 28

S. 30